

Siptrunk Gntel



General	
Provider url	voip.gntel.nl
SIP registration secure IP based	not applicable
Username	As given
Password	As given
Port 5060	5060
Dont register with server	NO
Send keepalive messages	YES
Unassigned businessnumbers	YES
Use for all numbers	YES
Advanced	
Support Anonymous calling	YES
Anonymous Caller Name	Empty
Anonymous Caller ID (CLID)	Empty
Use P-Asserted	YES
Use P-Preferred	NO
Use Diversion header	YES
Support external redirect	YES
Normalization rules	
Default Normalization	Internationaal (+E164)
CUSTOM SIP options	none


Note:

Siptrunk test rapport

Date 27 march 2019



Provider	Gntel		
Country	Netherlands		
Registration	<input checked="" type="checkbox"/>		
P-Asserted-Identity / P-Preferred-Identity	<input checked="" type="checkbox"/> P-Asserted	<input type="checkbox"/> P-Preferred	
Diversion Header	<input checked="" type="checkbox"/>		
Outgoing calls (Nat/Int.)	<input checked="" type="checkbox"/>		
Incomming calls(Nat/Int.)	<input checked="" type="checkbox"/>		
Right CLIP incomming (Nat/Int.)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
Music on Hold	<input checked="" type="checkbox"/>		
Support external redirect	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
Normalization (local/national/international)	<input type="checkbox"/> local	<input type="checkbox"/> Nat	<input checked="" type="checkbox"/> Int
CLIR (Anonymous calls)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
CLIP (no screening)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
Secure RTP/TLS	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	
Fax T.38 support (incomming/outgoing)	<input checked="" type="checkbox"/> Incomming	<input checked="" type="checkbox"/> Outgoing	<input type="checkbox"/> No
DDI support incoming/outgoing	<input checked="" type="checkbox"/> Incomming	<input checked="" type="checkbox"/> Outgoing	
Sending CLIP(Nat/Int.)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
DTMF (SIP-INFO)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
DTMF receive (RFC 2833)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
DTMF <=> PSTN	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
CODECS G711a/G711u	<input checked="" type="checkbox"/> G711a <input checked="" type="checkbox"/> G711u		

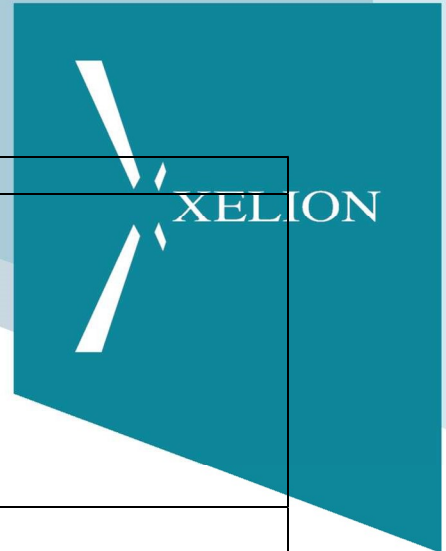

CODECS G723/G726/GSM/SPEEX/iLBC	<input checked="" type="checkbox"/> G722 <input type="checkbox"/> G726 <input type="checkbox"/> GSM <input type="checkbox"/> SPEEX <input type="checkbox"/> iLBC
CODECS G729	<input type="checkbox"/> G729
SIP Proxy software	gnTel VoIP Interconnect
Tested with Xelion firmware version	Xelion Version 7 patch 5 (CentOS 7)

Note: Settings for Xelion Version 7

